

# GABIONS

## Gabions

Gabions are baskets made of hexagonal woven wire Mesh Type 80, commonly referred to as double twist wire mesh as per SANS 1580:2005 (Figure 1 and Table 1). Gabions are filled with rock at the project site to form flexible, permeable, monolithic structures such as retaining walls, channel linings and weirs for erosion control projects.

The steel wire used in the manufacture of the gabion is heavily zinc coated Class A as per SANS 675:1997 (Table 2). The tolerances of mesh and wire are shown in Tables 1 and 2.

In order to reinforce the structure, all mesh panel edges are selvedged with a wire having a greater diameter than the mesh wire. The gabion is divided into cells by means of diaphragms positioned at approximately 1m centres (Figure 1). Dimensions and sizes of galvanised and PVC coated gabions are shown in Table 3. When specifying Gabions in the tender documents or bill of quantities, please refer to Table 4.

## Filling and Lacing

The Gabions must be filled with rock ranging between 100 mm and 250 mm. The range in sizes may allow for a variation of 5% oversize and / or 5% undersize rock, provided it is not placed at the exposed surface. In all cases, oversize rock shall not be larger than 300 mm and the undersize rock shall not be smaller than 100 mm. Rocks shall be hard, angular to round, durable and of such quality that they shall not disintegrate on exposure to water or weathering during the life of the structure. Care should be taken when placing the stone to ensure that the zinc coating on gabions is not damaged. All visible faces should be carefully hand placed for appearance purposes. For further information on the installation of gabions please refer to the [Installation Guidelines](#) for Gabions.

In place of lacing wire, lacing operations can be made by using a Spenax tool (Figure 4) available from our offices together with stainless steel rings (Figure 3A) having the following specifications:

- diameter: 3mm
- tensile strength: 156-178 kg/mm<sup>2</sup>

Spacing of the rings or loops must not exceed that shown in Figure 3B.

## Wire

All tests on wire are performed prior to manufacturing the mesh.

1. **Tensile strength:** The wire used for the manufacture of the gabions has a tensile strength between 350-575 N/mm<sup>2</sup> according to SANS 675:1997.
2. **Elongation:** Elongation is not less than 10% in accordance with EN 10223-3. Tests are carried out on a sample at least 25 cm long.
3. **Adhesion of zinc:** The adhesion of the zinc coating to the wire is such that, when the wire is wrapped six turns around a mandrel having four times the diameter of the wire, it does not flake or crack when rubbed with the bare fingers, in accordance with SANS 675:1997.
4. **Ductility:** The ductility of the zinc-coated wire is such that when the wire is wrapped at least eight times around a wire having the same diameter of the test specimen at a rate not exceeding 15 turns per minute and then unwrapped at the same rate, it does not show any sign of fracture of the underlying steel wire in accordance with SANS 675:1997.

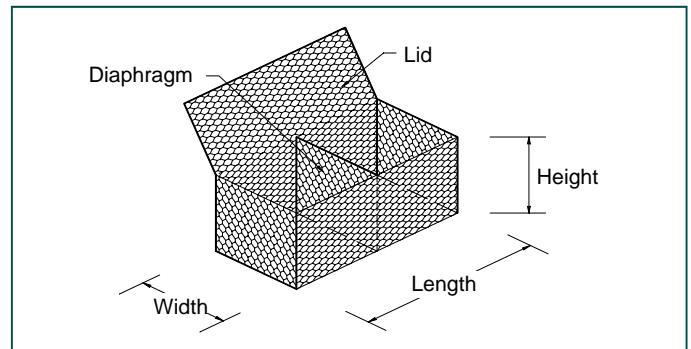


Figure 1

STANDARD MESH-WIRE			
Mesh Type 80	b	Tolerance (mm)	OD Wire Ø (mm)
Galvanised	80	-4 +10	3,0

	<p><b>MESH TOLERANCE</b> The tolerance on the opening of mesh "b" being the distance between the axis of two consecutive twists according to SANS 1580:2005.</p>
--	--

Table 1

PROPERTIES OF WIRE				
Use	Units	Lacing	Mesh	Selvedge
Wire**	Ø mm			
Galvanised		2,5	3,0	3,9
Wire Tolerance*	Ø mm	±0,08	±0,08	±0,1
Quantity of zinc*	g/m <sup>2</sup>	260	275	290
Tensile strength*	N/mm <sup>2</sup>	350-575		

\* According to SANS 675:1997

\*\* According to SANS 1580:2005 and SANS 675:1997

Table 2


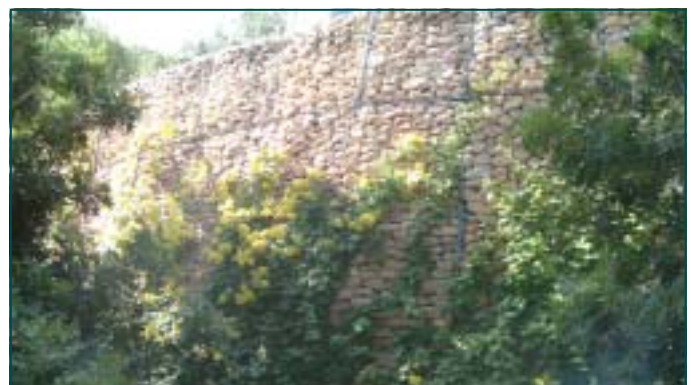


Figure 2


STANDARD GABION SIZES		
Length (m)	Width (m)	Height (m)
1,0	1,0	1,0
1,5	1,0	1,0
2,0	1,0	1,0
3,0	1,0	1,0
4,0	1,0	1,0
2,0	0,5	0,5
2,0	1,0	0,5
3,0	1,0	0,5
4,0	1,0	0,5

Tolerances : Height, Width:  $\pm 5\%$ ; Length:  $\pm 10\%$   
All sizes and dimensions are nominal.

**Table 3**

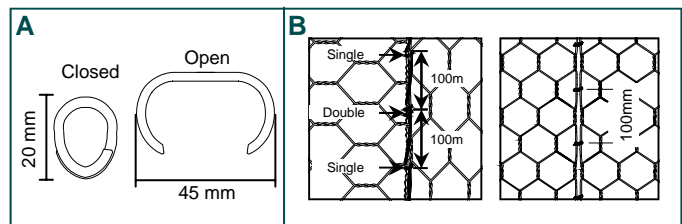

**Figure 3**

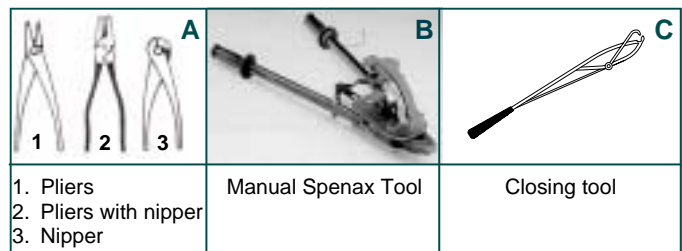

**Figure 4**

BILL OF QUANTITIES					
Item No.	Description	Unit	Quantity	Rate	Amount (R)
	GABIONS - SANS 1200DK:1995 (Double twist hexagonal wire mesh to SANS 1580:2005).				
1	GABIONS (Including material and delivery).				
1.1	Mesh Type 80 with 3,0mm Class A Galvanised wire. Length x Width x Height	m <sup>3</sup>			
2	Surface preparation for bedding of Gabions.	m <sup>2</sup>			
3	Installation of Gabions (Including unfolding, placing, filling, lacing and bracing).	m <sup>3</sup>			
4	Rockfill.	m <sup>3</sup>			
5	Packing selected stone for exposed face.	m <sup>2</sup>			
6	AG GEOTEXTILE (Including material, delivery, unrolling, cutting and placing). Continuous Polyester Filament Double Needle-Punched.				
6.1	AG150 - Minimum Energy Absorption of 4,0 kN/m	m <sup>2</sup>			
6.2	AG200 - Minimum Energy Absorption of 6,5 kN/m	m <sup>2</sup>			
6.3	AG300 - Minimum Energy Absorption of 10 kN/m	m <sup>2</sup>			
6.4	AG400 - Minimum Energy Absorption of 12 kN/m	m <sup>2</sup>			

**Table 4**